

# SMC-150/152F

## 15" Flat Color Monitor




- 15" flat screen CRT, 0.66mm stripe pitch, 90° deflection
- More than 400 TV Lines of resolution
- Metal case design that prevents electro-magnetic interference
- Looping through 2 channel input/output respectively for video/audio
- 1 channel input each for video/voice (for VCR)
- Voice I/O (1.5W)
- Improved product stability and life through the use of solid state circuits
- High-pressure isolation function when deflection is stopped

### Specifications

Model		SMC-150F	SMC-152F
System		NTSC/PAL	
Picture Tube		15" CRT, 0.66mm Stripe Pitch, 90° Deflection	
Horizontal Resolution		400 TV Lines or more	
Input Signal		Composite 1.0Vp-p	
Video	Input	2 BNC 1 BNC for VCR	4 BNC 1 BNC for VCR
	Output	2 BNC	1 BNC
Audio	Input	2 RCA Line level 500mV, 47Kohm(Hi-Impeadance)	4 RCA
		1 RCA for VCR	1 RCA
	Output	2RCA	
Horizontal Synchronization Frequency		NTSC:15.734KHz±500Hz / PAL:15.75KHz±500Hz	
Vertical Synchronization Frequency		NTSC:60Hz±4Hz / PAL:50Hz±4Hz	
High Voltage		26KV ±1.5KV	
Audio Output		1.5W	
Operating Temperature		-10°~+50°	
Operating Humidity		0%~90%	
Power Requirement		AC100~240V, 50/60Hz	
Power Consumption		62W	
Weight		13Kg	
Dimensions		365(W) x 341(H) x 391(D) mm	

### Dimensions (unit:mm)

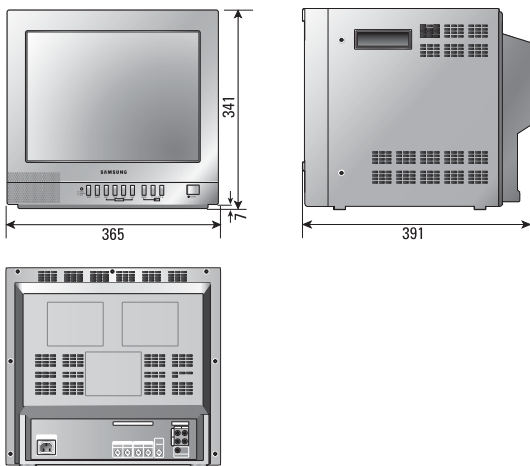

• Design and specifications are subject to change without notice.