




SMT-171(P) / SMT-190(P)

Professional 17"/19" Tempered Glass TFT-LCD Monitor

Features

- Displays a full, flat 17", 19" diagonal image
- High resolution (active native: 1280 x 1024 @ 60Hz)
- High Contrast Ratio (700:1)
- High Brightness (300cd/m²)
- Wide Viewing Angle (H:150°/V:135°)
- Screen aspect ratio : 5:4
- Pixel Pitch : 17" : 0.264 x 0.264(mm), 19" : 0.294 x 0.294(mm)
- Output Color : 17" : 16.2 million, 19" : 16.7 million (256 RGB Level)
- Power Consumption : 17" : 36W, 19" : 42W
- Advanced Interface: 2 CVBS (2 LOOP OUT), SVHS (1 LOOP OUT), analog VGA input
- VESA wall mount
- Tempered glass

Dimensions (unit : mm)

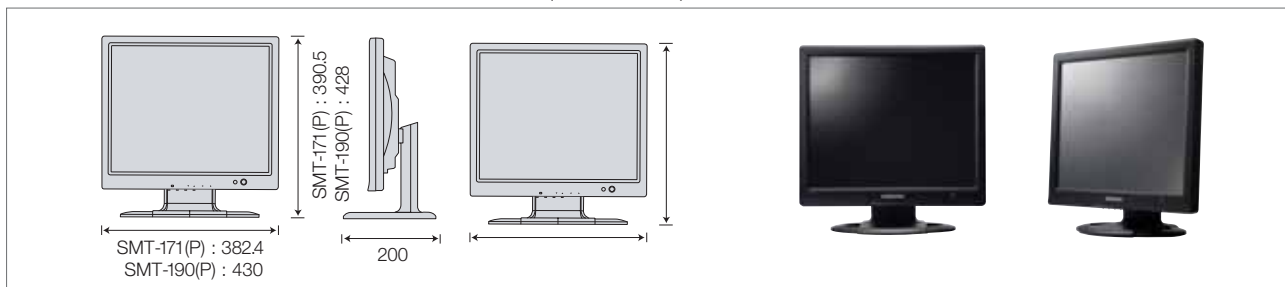

Specifications

		SMT-171(P)	SMT-190(P)
Video	Composite	2Ch input 10Vp-p, 75Ω terminated, loop-through out	
	S-Video	1Ch input(Y/C), loop-through out	
	VGA	1Ch input	
Resolution		1280 x 1024 @ 60Hz	
Frequency	Horizontal(KHz)	31KHz ~ 82KHz	31 KHz ~ 80KHz
	Vertical(Hz)	50Hz ~ 77Hz	50Hz ~ 75Hz
VGA Mode		720x480@60Hz,720x576@50Hz,800x600@60/75Hz 1024x768@60/75Hz,1280x1024@60/75Hz	
Power Consumption		Max. 36W	Max. 42W
Power Supply		DC12V/4A	
Environmental Considerations	Operation Temperature	50°F ~ 104°F(10°C ~ 40°C)	
	Operation Humidity	10%~80%,Non-condensing	
	Storage Temperature	-4°F ~ 113°F(-20°C ~ 45°C)	
	Storage Humidity	5%~95%,Non-condensing	
LCD Panel Spec	Size	17" Diagonal AM-TFT	19" Diagonal AM-TFT
	Active Display Area	337.92 x 270.336 mm	376.32 x 301.056 mm
	Pixel Pitch	0.264 mm(H) x 0.264 mm(V)	0.294 mm(H) x 0.294 mm(V)
	Brightness	300cd/m ²	
	Contrast Ratio	700:1	
	Response Time	8ms	
	Viewing Angle(L/R/T/B)	75/75/75/60	
	Dimensions(WxDxH)	Net	382.4 x 200 x 390.5 mm
Net Weight		5.96Kg	6.61Kg
Packing		436 x 225 x 476 mm	490 x 225 x 506 mm

* "P" indicates PAL model & "N" or no specific alphabet after the model name indicates NTSC model