




Smoke Detector Camera

Features

- Sony Super HAD CCD sensor
- Built-in Cone Lens 3.7 mm
- DC voltage

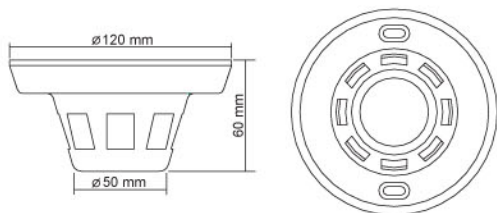

| Model No. | RYK-2611 | RYK-2685 | RYK-3641 | RYK-3643 |
|--------------------|---|-------------------------------------|---|-----------------------------------|
| Image Device | 1/3" Color Sony Super HAD | 1/3" Color Sony Super HAD (Hi-Res.) | 1/3" B/W Sony Super HAD | 1/3" B/W Sony Super HAD (Hi-Res.) |
| Picture Elements | NTSC:510x492, PAL:500x582 | NTSC:768x494, PAL:752x582 | EIA:510x492, CCIR:500x582 | EIA:768x494, CCIR:752x582 |
| Resolution | 380 TVL | 470 TVL | 420 TVL | 600 TVL |
| Min. Illumination | 0.2 Lux / F2.0 | 0.3 Lux / F2.0 | 0.1 Lux / F2.0 | 0.2 Lux / F2.0 |
| S/N Ratio | More than 48dB | | | |
| Electronic Shutter | NTSC:1/60~1/100,000, PAL:1/50~1/110,000 | | EIA:1/60~1/100,000, CCIR:1/50~1/110,000 | |
| Gamma | 0.45 | | | |
| Lens Furnished | Cone Lens 3.7mm / F2.0 | | | |
| White Balance | Auto | | — | |
| Gain Control | Auto | | | |
| Sync. System | Internal | | | |
| Video Output | 1 Vp-p / 75 Ohms | | | |
| Audio Output | 2 Vp-p / 50 Ohms (option) | | | |
| Power Supply | DC12V±10% | | | |
| Power Consumption | 142mA max. | 110mA max. | 117 mA max. | |
| Operating Temp. | -10°C ~ 50°C | | | |